


HANAR  STENT®

Trachea/Bronchium (CCC)

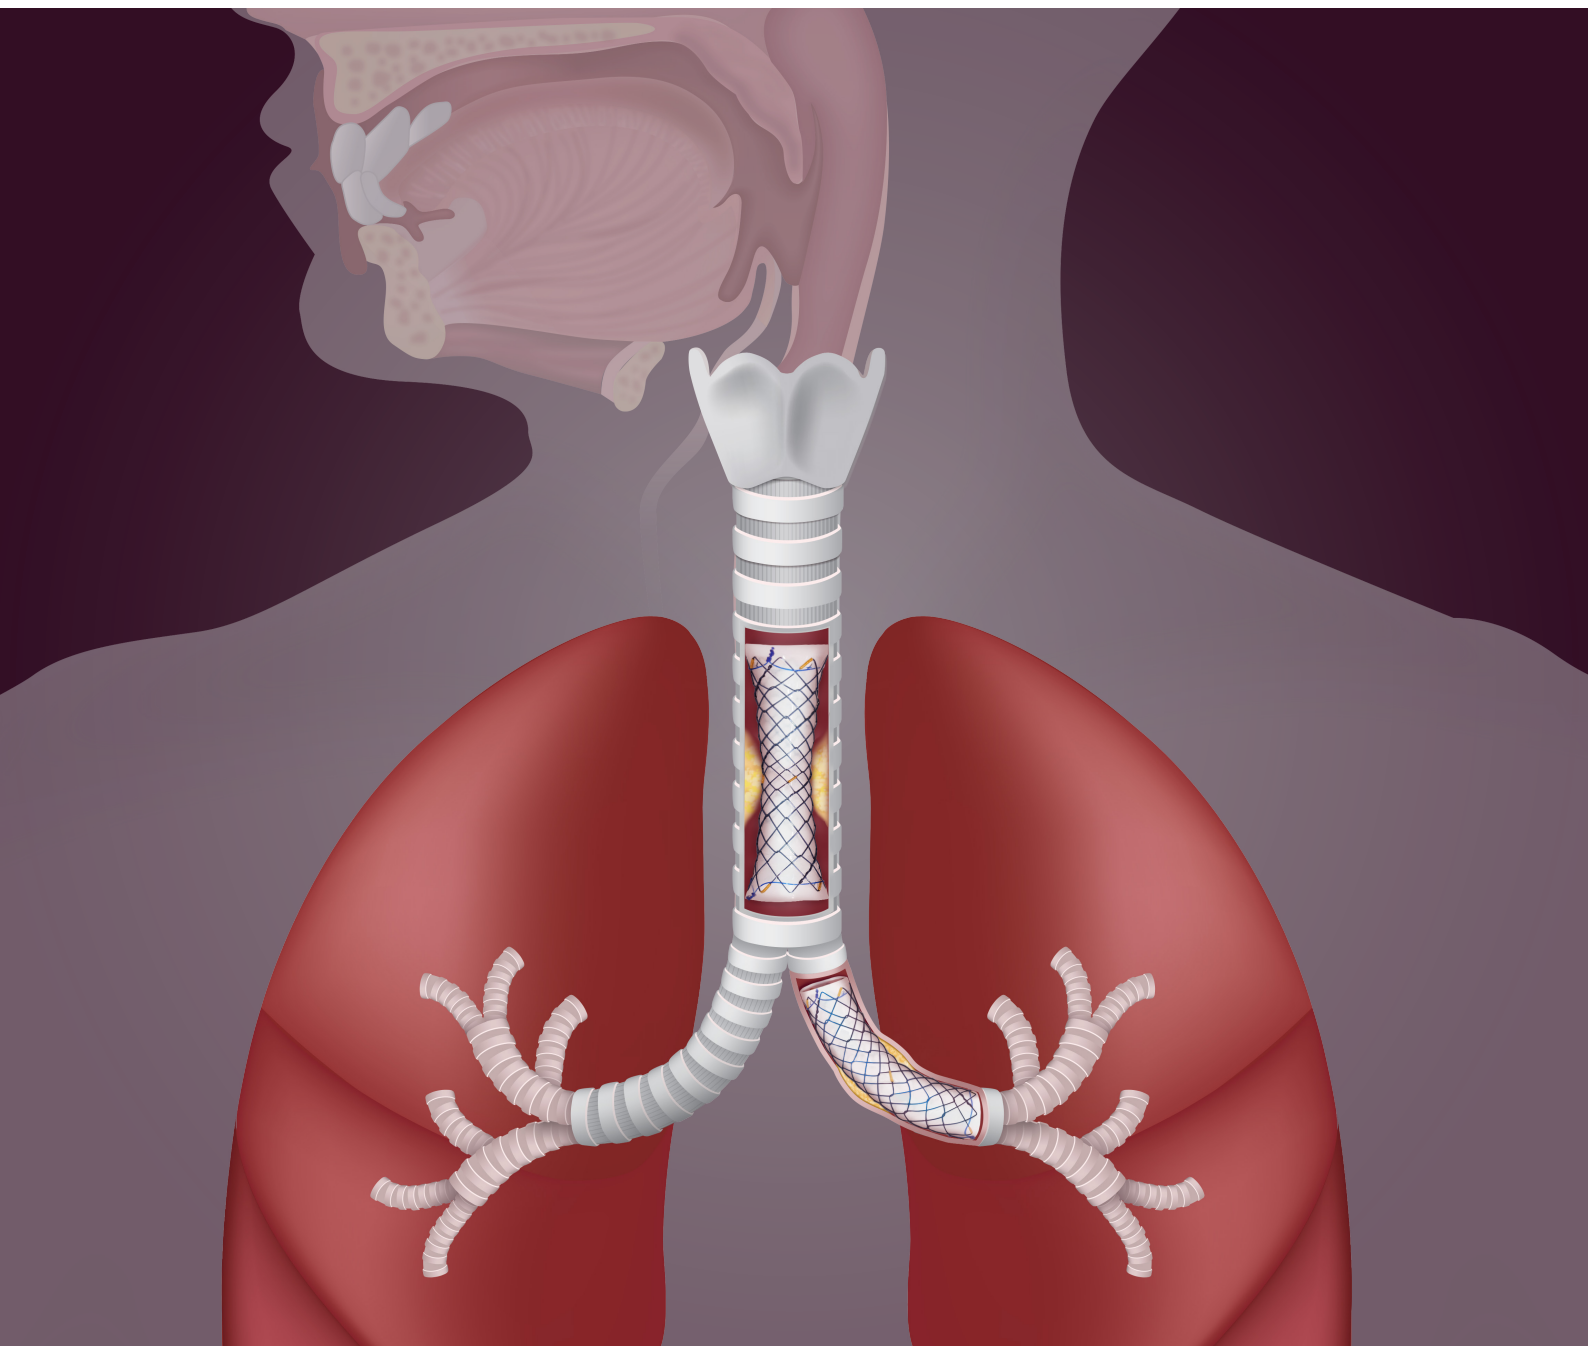

Tracheobronchial Self Expandable Metallic Stent

HANAR STENT®


Trachea/Bronchium (CCC)

Features




6 or 8mm Delivery Device

- 1 Flare for Anti-Migration
- 2 Lassos on the both ends for repositioning
- 3 Radiopaque markers on the proximal, distal and middle of the stent to assist with placement under fluoroscopy
- 4 Coated membrane for easy sputum flow and Skirt prevent tumor overgrowth

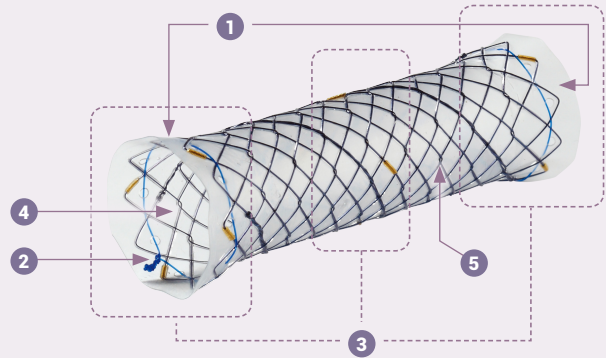

5 Hook&Cross Weaving Structure



- Hook**
Flexibility to conform within the anatomy
- Cross**
High pushability through catheter during deployment within the anatomy

Indications for use

This stent is indicated for application in palliative treatment of tracheo/bronchial stricture and/or tracheo-esophageal fistula caused by malignant tumors.

Ordering Information

※ Sizing and availability varies by country

● NTS

Model	Stent(mm)			Delivery Device	
	Diameter	Usable Length*	Total Length*	Length (mm)	Diameter (mm/Fr)
NTS-10-030-050	14-10-14	20	30	500	6/18
NTS-10-080-050		70	80	500	6/18
NTS-12-030-050	16-12-16	20	30	500	6/18
NTS-12-080-050		70	80	500	6/18
NTS-14-030-050	16.5-14-16.5	20	30	500	6/18
NTS-14-080-050		70	80	500	6/18
NTS-16-030-050	18.6-16-18.6	20	30	500	6/18
NTS-16-080-050		70	80	500	6/18
NTS-10-030-090	14-10-14	20	30	900	6/18
NTS-10-080-090		70	80	900	6/18
NTS-12-030-090	16-12-16	20	30	900	6/18
NTS-12-080-090		70	80	900	6/18
NTS-14-030-090	16.5-14-16.5	20	30	900	6/18
NTS-14-080-090		70	80	900	6/18
NTS-16-030-090	18.6-16-18.6	20	30	900	6/18
NTS-16-080-090		70	80	900	6/18

* Increment of 10mm

Model	Stent(mm)			Delivery Device	
	Diameter	Usable Length*	Total Length*	Length (mm)	Diameter (mm/Fr)
NTS-18-030-050	20.5-18-20.5	20	30	500	8/24
NTS-18-080-050		70	80	500	8/24
NTS-20-030-050	22.7-20-22.7	20	30	500	8/24
NTS-20-080-050		70	80	500	8/24
NTS-22-030-050	24.7-22-24.7	20	30	500	8/24
NTS-22-080-050		70	80	500	8/24
NTS-18-030-090	20.5-18-20.5	20	30	900	8/24
NTS-18-080-090		70	80	900	8/24
NTS-20-030-090	22.7-20-22.7	20	30	900	8/24
NTS-20-080-090		70	80	900	8/24
NTS-22-030-090	24.7-22-24.7	20	30	900	8/24
NTS-22-080-090		70	80	900	8/24

* Increment of 10mm